


XL-10 Multi-Pin Breakout Cable for 442 Mixer

The XL-10 multi-pin breakout cable provides quick, convenient access to the 442 mixer's multi-pin audio connector. The XL-10 extends the mixers multi-pin connection and provides separate, balanced XLR outputs (left and right) plus the Return-A send to the 442. It can be used with cameras or recorders to provide a single cable carrying multiple signals.

The XL-10 consists of two pieces, the breakout segment and the Hirose-to-Hirose extension cable. The breakout segment can be used independent of the extension segment for applications where short cable runs are feasible.

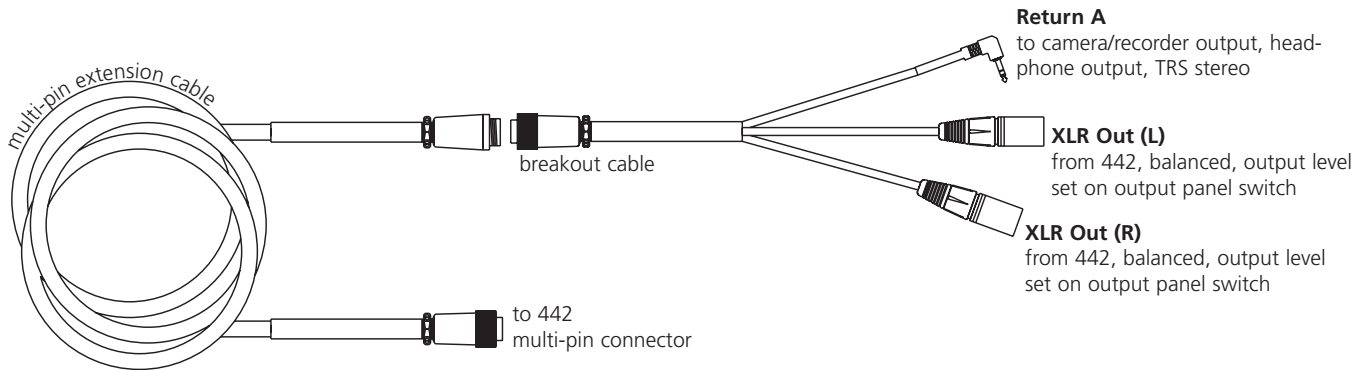

Operational Notes

- The XL-10 can be used with and without the extension cable.
- Additional microphone cable can be connected to the individual XLR connectors on the breakout cable. Use high-quality microphone cable when extending the XLR lengths.
- The Return-A segment is unbalanced.
- Additional length segments of extension cable can be added for long cable runs (contact Sound Devices for extension cable suppliers).

Specifications

Connectors:	Hirose 10-pin male (2), Hirose 10-pin female (1), Neutrik XLR-M (2), 3.5 mm TRS right-angle(1)
XLR Output:	Neutrik XLR-M, pin-2 (+), pin 3 (-), pin 1 (ground)
Return A:	3.5 mm, unbalanced, tip-left, ring-right, sleeve-ground
Length:	XLR breakout - 61 cm, 24 inch (3.5 mm 66 cm, 26 inch) extension - 610 cm, 20 feet
Cable Type:	Belden 1904A

